

mahindra
IMPLEMENTS



THE OFFICIAL IMPLEMENTS OF TOUGH



TABLE OF CONTENTS

| | |
|-----------------------------------|----|
| Introduction | 3 |
| Rear-Mounted Snow Blowers | 4 |
| Rear-Mounted Snow Blowers | 6 |
| Skid-Steer Snow Blades | 8 |
| Skid-Steer Snow Pushes | 10 |
| Front-Mounted Rotary Brooms | 12 |
| Options & Upgrades | 14 |



THE OFFICIAL IMPLEMENTS OF TOUGH.

Mahindra implements are a superior choice. Officially, they're engineered to be as tough as our tractors, with value-packed features, then field-tested to ensure they meet the strictest standards. We overbuild them for years of uninterrupted performance so you can focus on transforming the property you own into the land you love!

In this guide, we've taken the time to eliminate the guesswork by matching all current-selling tractors to available implements. But if you are a novice, no worries! There are 500 Mahindra dealers ready to guide you toward the right implement.

FRONT-MOUNTED SNOW BLOWERS

MAINTAINING DRIVEWAYS, PARKING LOTS, AND ROADS

Mahindra front-mounted snow blowers, powered by a mid PTO-connected belt drive system, allow operators to quickly blow powdery and wet snow at a great distance and in one pass. Commercial-duty models are used in airports, churches, hospitals, city roads, schools, and shopping centers, while residential-duty blowers rapidly clear home driveways and sidewalks. Consider adding on a cab, snowdrift cutters, headlights, and a remote-controlled spout deflector.

FEATURES & BENEFITS

- Stout auger and impeller, with shear bolt protection and heavy-duty gear box, aggressively chops and disperses snow and ice
- 10- and 12-gauge housing with double-walled bottom base and reversible and replaceable scrape blade help protect snowblower housing against damage
- 48- to 66-inch models Include long-lasting, zero-maintenance 2-inch timing belt to eliminate vibration and minimize noise
- Adjustable and replaceable skid shoes for gliding over various terrains with ease
- For most models, easily switch to blade or broom using an interchangeable mounting frame



SPECIFICATIONS

| BLOWER FEATURES | 48-INCH | | 60-INCH | 66-INCH | 78-INCH |
|----------------------------------|---|----------------------------|----------------------------|------------------------|--------------------|
| Connector Type | Fixed-mount; Belt Drive | | | | Fixed-mount; Chain |
| Frame Connector | Interchangeable with blade | | Interchangeable with broom | | |
| Tractor PTO Power (hp) | 14 - 22 | 14 - 25 | | 19 - 31 | 46 - 49 |
| Box Width (inch) | 48 | | 60 | 66 | 78 |
| Box Height (inch) | 21 | 27 | 23 | 27 | 28 |
| Housing (gauge) | 10 & 12 | | | | |
| Gear Box | Heavy-duty; Maintenance-free | | | | |
| 4-Blade Impeller Diameter (inch) | 14 | 18 | 14 | 18 | 26 |
| Drive Type | 2-inch Belt Drive; No maintenance, no adjustments, eliminates vibrations, & reduces noise | | | | Chain |
| Scraper Bar Blade | 1/4 x 2 inch | 3/8 x 2 inch | 1/4 x 2 inch | 3/8 x 2 inch | |
| | Hardox 400 Steel; Reversible and replaceable | | | | |
| Skid Shoes | Adjustable and replaceable | | | | |
| Spout Deflection | Manual; Optional electric or hydraulic | | | | Hydraulic |
| Chute Rotation | Manual | Hydraulic | | | |
| Warranty | 2-year residential | 2-year commercial | 2-year residential | 2-year commercial | |
| SKU No. | BEREMXSB48 | BERSB48C ^{[1][2]} | BERSB60 ^[1] | BERSB66 ^[1] | BER2500SB78 |
| TRACTOR COMPATIBILITY | 48-INCH | | 60-INCH | 66-INCH | 78-INCH |
| eMax 20S | X | | | | |
| eMax 22L | | X | X | | |
| eMax 25L | | X | X | | |
| Max 25XL | | X | X | | |
| Max 26XLT | | X | X | | |
| 1626 | | | | X | |
| 1635 | | | | X | |
| 1640 | | | | X | |
| 2638 | | | | X | |
| 2645 | | | | | |
| 2660 | | | | | X |

[1] Requires tractor fitting kit

[2] Requires Ag tires

REAR-MOUNTED SNOW BLOWERS

MAINTAINING DRIVEWAYS, PARKING LOTS, AND ROADS

Mahindra rear-mounted snow blowers, PTO-powered using a 3-point connection, allow operators to blow powdery and wet snow quickly at a great distance and in one pass. Commercial-duty models can be used in airports, churches, hospitals, city roads, schools, and shopping centers, while residential-duty blowers rapidly clear home driveways and sidewalks. Consider adding on a cab, snowdrift cutters, headlights, and a remote-controlled spout deflector.

Be sure to ask about our eMax / MaxXL (SKU No. BERMXCAB) or a 1600 Series (SKU No. BERXLCAB) 360°-degree clear view soft cab.

FEATURES & BENEFITS

- Heavy-duty auger and impeller with shear bolt protection, aggressively chops and disperses snow and ice
- Double-walled bottom base and reversible and replaceable scrape blade help protect snowblower housing against damage
- Adjustable and replaceable skid shoes glide over various terrains with ease
- On hydraulic chute models, upgrade to electric chute rotation (freeing up a hydraulic connection)



SPECIFICATIONS

| BLOWER FEATURES | 48-INCH | | | 56-INCH | | | 64-INCH | | | 72-INCH | | | 78-INCH | |
|----------------------------------|--|-------------|-------------|------------|-------------|-------------|----------------------------|-------------|-------------|------------|-------------|-------------|------------|--|
| Connector Type | 3-point | | | | | | | | | | | | | |
| Category | 1 | | | | | | | | | | | | | |
| Tractor PTO Power (hp) | 14 - 25 | | | | | 18 - 40 | | | 25 - 40 | | | 46 - 54 | | |
| Housing (gauge) | 10 & 12 | | | | | | | | | | | | | |
| Box Width (inch) | 48 | | | 56 | | | 64 | | | 72 | | | 78 | |
| Box Height (inch) | 27 | | | 23 | | | 27 | | | | | 28 | | |
| Gear Box | Heavy-duty; Maintenance-free | | | | | | | | | | | | | |
| Timing Belt Drive | 2-inch; No maintenance, no adjustments, eliminates vibrations, & reduces noise | | | | | | — | | | | | | | |
| Chain Drive | — | | | | | | Self-tensioning with guard | | | | | | | |
| 4-Blade Impeller Diameter (inch) | 22 | | | | | | 26 | | | | | | | |
| Scraper Bar Blade | 3/8 thick x 3 tall; Hardox 400 Steel; Reversible and replaceable | | | | | | | | | | | | | |
| Skid Shoes | Adjustable and replaceable | | | | | | | | | | | | | |
| Spout Deflection | M | E | M | E | M | E | M | E | M | E | M | E | M | |
| Chute Rotation | M | E | H | M | E | H | M | E | H | M | E | H | M | |
| Parking Stand | Standard | | | | | | | | | | | | | |
| Warranty | 2-year residential | | | | | | | | | | | | | |
| SKU No. | BER3PTS48R | BER3PTS48RE | BER3PTS48RH | BER3PTS56R | BER3PTS56RE | BER3PTS56RH | BER3PTS64R | BER3PTS64RE | BER3PTS64RH | BER3PTS72R | BER3PTS72RE | BER3PTS72RH | BER3PTS78H | |
| TRACTOR COMPATIBILITY | 48-INCH | | | 56-INCH | | | 64-INCH | | | 72-INCH | | | 78-INCH | |
| eMax 20S | X | | X | | | | | | | | | | | |
| eMax 22L | X | | X | X | | X | | | | | | | | |
| eMax 25L | X | | X | X | | X | | | | | | | | |
| Max 25XL | X | | X | X | | X | | | | | | | | |
| Max 26XLT | X | | X | X | | X | | | | | | | | |
| 1626 | | | | | | | X | | | X | | | | |
| 1635 | | | | | | | X | | | X | | | | |
| 1640 | | | | | | | X | | | X | | | | |
| 2638 | | | | | | | X | | | X | | | | |
| 2645 | | | | | | | X | | | X | | | | |
| 2660 | | | | | | | X | | | X | | | X | |
| 2670 | | | | | | | X | | | X | | | X | |

E = Electric H = Hydraulic M = Manual

SKID-STEER SNOW BLADES

CLEAR BARNs, DRIVEWAYS, PARKING LOTS, AND ROADS

Mahindra skid-steer snow blades are stellar performers at farms, churches, neighborhoods, shopping centers, and other venues that operate many front attachments. Not just for snow, these blades remain firm on the ground at all times, removing vast amounts of aggregate in a single pass while leaving behind strategically placed windrows. Use for back dragging, too, getting very close to curbs, garages, or other structures.

FEATURES & BENEFITS

- For manual adjustment blades, we offer five locking left and right positions from 0° to 25° degrees
- Equipped with trip spring protection system to help prevent blade and tractor damage
- Heavy-duty steel, adjustable and replaceable skid shoes, and reversible and replaceable scraper bar for long product life
- Scraper blades float and tilt 5° helps maintain ground contour contact



SPECIFICATIONS

| BLADE FEATURES | 62-INCH | 72-INCH |
|----------------------------|---|---------------|
| Connector Type | Skid Steer | |
| Tractor Power (hp) | 19 - 44 | 22 - 44 |
| Blade Width (inch) | 62 | 72 |
| Blade Height (inch) | 22.5 | |
| Blade Thickness (gauge) | 10 & 12; 1/4-inch rear plate reinforcements | |
| Scraper Bar Blade | Reversible and replaceable | |
| Operating Angles (degrees) | 0 - 25 left & 0 - 25 right | |
| Rotation Power | Manual | |
| Warranty | 1-year residential | |
| SKU No. | BERBLLD62MSSL | BERBLLD72MSSL |
| TRACTOR COMPATIBILITY | 62-INCH | 72-INCH |
| eMax 22L | X | X |
| eMax 25L | X | X |
| Max 25XL | X | X |
| Max 26XLT | X | X |
| 1626 | X | X |
| 1635 | X | X |
| 1640 | X | X |
| 2638 | X | X |
| 2645 | X | X |
| 2660 | | X |
| 2670 | | |
| 3640 | | |
| 3650 | | |
| 4540 2WD / 4WD | | |
| 4550 4WD | | |
| 6065 / 6075 | | |



SKID-STEER SNOW PUSHES

PUSH, BACK DRAG, AND STACK SNOW OR OTHER DEBRIS

If you want to avoid making windrows, a Mahindra skid-steer snow push is your best bet to contain, push and stack snow. What's more, its commercial-duty enclosed design has no moving parts that can break or malfunction. It's quicker at clearing snow in a parking lot than its snow plow cousin, and is great for moving other materials, too, including manure and food in feedlots. Snow pushes can be found working around farms, parking lots, city and side streets, and other venues that operate many skid-steer attachments.

FEATURES & BENEFITS

- Strong steel housing, durable skid shoes and reinforced side plates capture and remove even the heaviest snow without leaving windrows or spillover
- Reversible and replaceable steel cutting edge designed to clear snow on concrete and asphalt
- Optional pull back kits for back dragging snow from buildings, fences and confined areas
- Optional marker kits for increased plow edges visibility

SPECIFICATIONS

| PUSH FEATURES | 62-INCH | 72-INCH |
|-------------------------------|----------------------------------|----------|
| Connector Type | Skid-Steer | |
| Tractor Power (hp) | 19 - 44 | 22 - 44 |
| Max Tractor Weight (lb) | 3500 | |
| Housing Width (inch) | 62 | 72 |
| Housing Depth (inch) | 28 | |
| Housing Height (inch) | 22 | |
| Skid Shoes | Adjustable and replaceable | |
| Cutting Edge | Reversible and replaceable steel | |
| Markers Kit | Optional | |
| Pull Back Kit (Back Dragging) | Optional | |
| Warranty | 2-year residential | |
| SKU No. | BERSP62R | BERSP72R |
| TRACTOR COMPATIBILITY | 62-INCH | 72-INCH |
| eMax 22L | X | X |
| eMax 25L | X | X |
| Max 25XL | X | X |
| Max 26XLT | X | X |
| 1626 | X | X |
| 1635 | X | X |
| 1640 | X | X |
| 2638 | X | X |
| 2645 | X | X |
| 2660 | X | X |
| 2670 | X | X |

FRONT-MOUNTED ROTARY BROOMS*


SWEEP PARKING AREAS, AND RAKE OR DETHATCH LAWNS

Mahindra front-mounted rotary brooms are superb at rapidly sweeping snow and debris from parking lots, driveways, and walkways. What's more, they can be hydraulically adjusted for proper down force whether raking leaves and dethatching lawns, extending brush life. You'll see them operating at airports, churches, hospitals, schools, and shopping centers and in and around equine facilities, estates, and neighborhoods.

FEATURES & BENEFITS

- We offer rotary brooms for compact, compact-utility tractors and utility tractors
- Stay comfy and seated when hydraulically adjusting brush down force pressure or angling the broom left or right
- Easily switch to blower or blade using an interchangeable mounting frame
- 1-year warranty for peace-of-mind

•Available while current supply lasts.

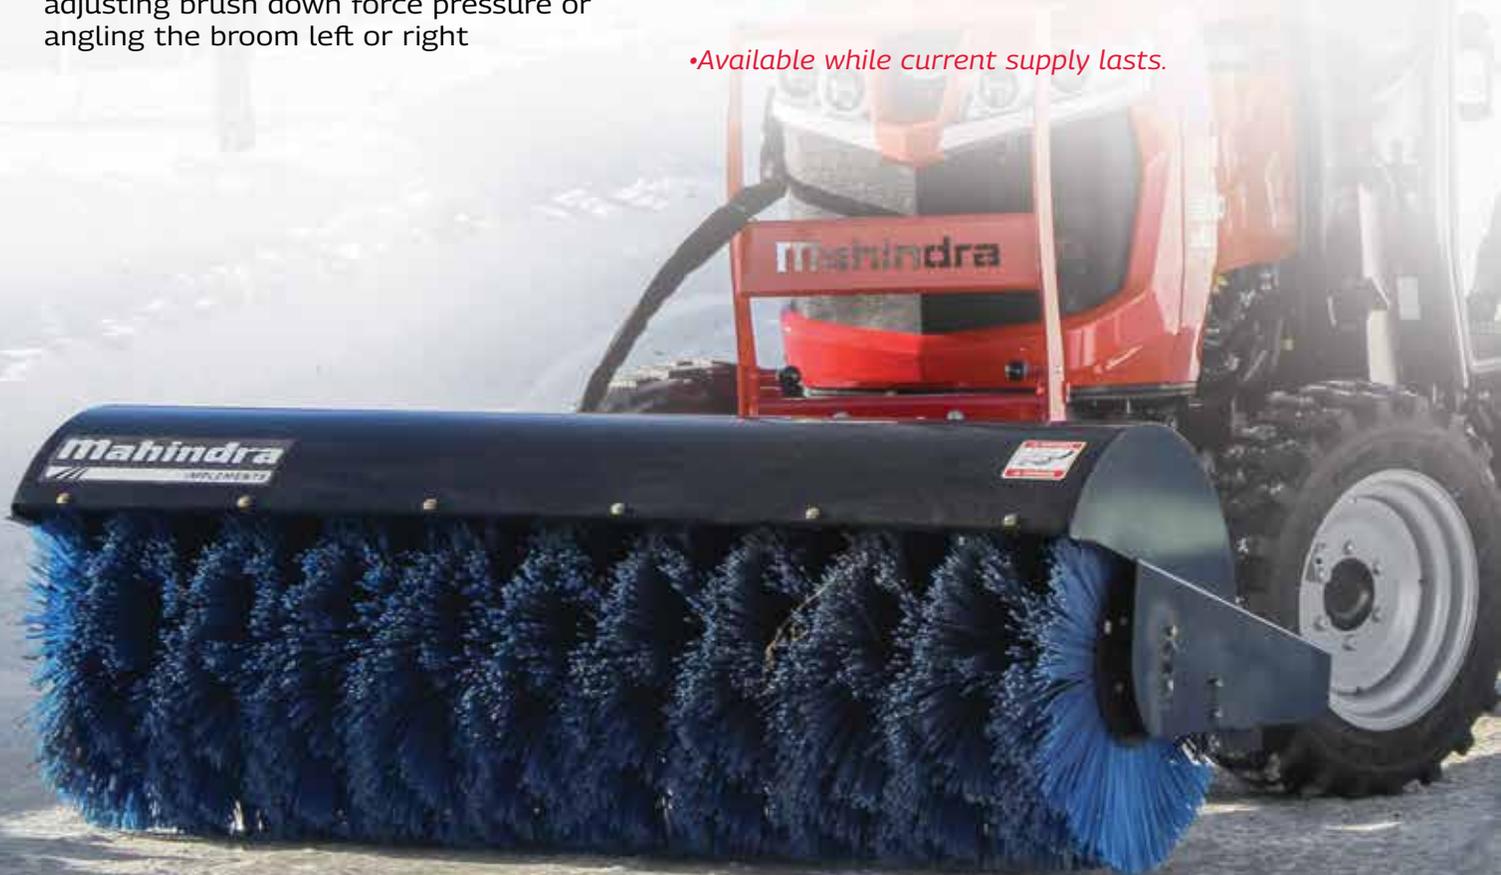

SPECIFICATIONS

| BROOM FEATURES | 60-INCH | | | 66-INCH | | | |
|------------------------------|--|------------|------------|-------------|-------------|-----------|-------------|
| Connector Type | Fixed-Mount; Interchangeable with blower | | | | | | |
| Tractor PTO Power (hp) | 15 - 17 | 20 | 22 | 19 - 22 | 26 - 28 | 28 - 30 | 30 - 31 |
| Broom Length x Height (inch) | 60 x 18 | | | 66 x 24 | | | |
| Brush Material | Stiff polypropylene | | | | | | |
| Brush Lift Pressure | Hydraulic via loader valve | | | | | | |
| Angle Power | Hydraulic via loader valve | | | | | | |
| Wheels | Heavy-duty; Pivoting | | | | | | |
| Parking Stand | Standard | | | | | | |
| Warranty | 2-year residential | | | | | | |
| SKU No. | BEREMXBR60 | BERMXBR60A | BERMXBR60B | BER1526BR66 | BER1635BR66 | BER15BR66 | BER2538BR66 |
| TRACTOR COMPATIBILITY | 60-INCH | | | 66-INCH | | | |
| eMax 20S | | | | | | | |
| eMax 22L | X | | | | | | |
| eMax 25L | X | | | | | | |
| Max 25XL | | X | | | | | |
| Max 26XLT | | | X | | | | |
| 1626 | | | | X | | | |
| 1635 | | | | | X | | |
| 1640 | | | | | | X | |
| 2638 | | | | | | | X |

OPTIONS & UPGRADES

DO MORE WITH YOUR MAHINDRA SNOW IMPLEMENTS

Mahindra implements are feature-packed and field-tested to ensure they last for years. However, many customers require upgraded functionality or additional protection for their tools. Use this chart to guide you should you need more from your Mahindra snow equipment.

| SKU NO. | PART DESCRIPTION | TRACTOR COMPATIBILITY | | | | | | | | | | | FITS IMPLEMENT | | |
|-----------------------------------|--------------------------------------|-----------------------|----------|-----------|------|------|------|------|------|------|------|----------------|----------------|----------|----------------------------------|
| | | eMax 20S | eMax 25L | Max 26XLT | 1626 | 1635 | 1640 | 2638 | 2645 | 2660 | 2670 | 4540 2WD / 4WD | | 4550 4WD | 6065 / 6075 |
| FRONT-MOUNTED SNOW BLOWERS | | | | | | | | | | | | | | | |
| BER7002391 | Manual Deflector Kit | X | | | | | | | | | | | | | BEREMXSB48 |
| BER7005182 | Electric Chute & Deflector Kit | X | | | | | | | | | | | | | BEREMXSB48 |
| BER7006612 | Hydraulic Deflector Kit | X | | | | | | | | | | | | | BEREMXSB48 |
| BER7005591 | Electric Deflector Kit | X | X | X | | | | | | | | | | | BEREMXSB48 BERSB60 |
| BER7006661 | Electric Deflector Kit | | | | X | X | X | X | X | | | | | | BERSB66 |
| BER700484 | Top Panel Extension | X | | | | | | | | | | | | | BEREMXSB48 |
| BER700472 | Extension Panel & Widening Angle Kit | X | | | | | | | | | | | | | BEREMXSB48 |
| BER700563 | Extension Panel & Widening Angle Kit | | X | X | | | | | | | | | | | BERSB60 |
| BER700792 | Side Wing Kit | | X | X | X | X | X | X | X | | | | | | BERSB66 |
| BER700260 | Drift Cutters, Pair | X | X | X | | | | | | | | | | | BEREMXSB48 BERSB60 BERSB66 |
| BER700670 | Drift Cutters, Pair | | | | X | X | X | X | X | | | | | | BERSB66 |
| BER700719 | Nylon Skid Shoes, Pair | X | | | | | | | | | | | | | BEREMXSB48 |
| BER701087 | Snowblower Fitting Kit | X | X | X | | | | | | | | | | | BERSB60 |

| SKU NO. | PART DESCRIPTION | TRACTOR COMPATIBILITY | | | | | | | | | | | FITS IMPLEMENT | | | | |
|------------------------------------|---|-----------------------|----------|-----------|------|------|------|------|------|------|------|----------------|----------------|----------|-------------|--|---|
| | | eMax 20S | eMax 25L | Max 26XLT | 1626 | 1635 | 1640 | 2638 | 2645 | 2660 | 2670 | 4540 2WD / 4WD | | 4550 4WD | 6065 / 6075 | | |
| REAR-MOUNTED SNOW BLOWERS | | | | | | | | | | | | | | | | | |
| BER7006662 | Electric Deflector Kit | X | X | X | X | X | X | X | X | X | | | | | | | BER3PTSB48R/RE/RH BER3PTSB56R/RE/RH BER3PTSB64R/RE/RH |
| SKID-STEER SNOW PUSHES | | | | | | | | | | | | | | | | | |
| BER108814 | Single Skid Shoe, 62- or 72-inch Models | | X | X | X | X | X | X | X | X | X | | | | | | BERSPP62R BERSPP72R |
| BER700991 | Back Drag, 62-inch Model | | X | X | X | X | X | X | X | X | X | | | | | | BERSPP62R |
| BER700992 | Back Drag, 72-inch Model | | X | X | X | X | X | X | X | X | X | | | | | | BERSPP72R |
| BER701005 | Two Pack Back Drag Skid Shoes | | X | X | X | X | X | X | X | X | X | | | | | | BERSPP62R BERSPP72R |
| FRONT-MOUNTED ROTARY BROOMS | | | | | | | | | | | | | | | | | |
| BER700685 | Rubber Deflector Kit, 66 x 24-inch | | | | | X | X | X | X | | | | | | | | BER1526BR66 BER1635BR66 BER15BR66 BER2538BR66 |
| SOFT CAB ENCLOSURES | | | | | | | | | | | | | | | | | |
| BERMXCAB | Soft Cab Enclosure | X | X | X | | | | | | | | | | | | | Not Applicable |
| BERXLCAB | Soft Cab Enclosure | | | | X | X | X | X | | | | | | | | | Not Applicable |



mahindra

9020 Jackrabbit Road, Suite 600

Houston, Texas 77095

(877) 449-7771

mahindrausa.com mahindracanada.ca

Mahindra USA, Inc., reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were made to verify the information contained in it. Some items shown may be optional and some machinery shown may not be available at all dealers. Mahindra disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety, and product information, consult your local Mahindra dealer and the product operation manual. Engine power (hp/kw) and other specifications are based on various standards and best practices. This brochure is intended for the United States and its territories only. For more information visit our website.

11082023